


Protective Cap for Plugs:

C19-309- _ _ _

To suit connector plugs to series:

VG95328; MIL-DTL-26482 Series I&II

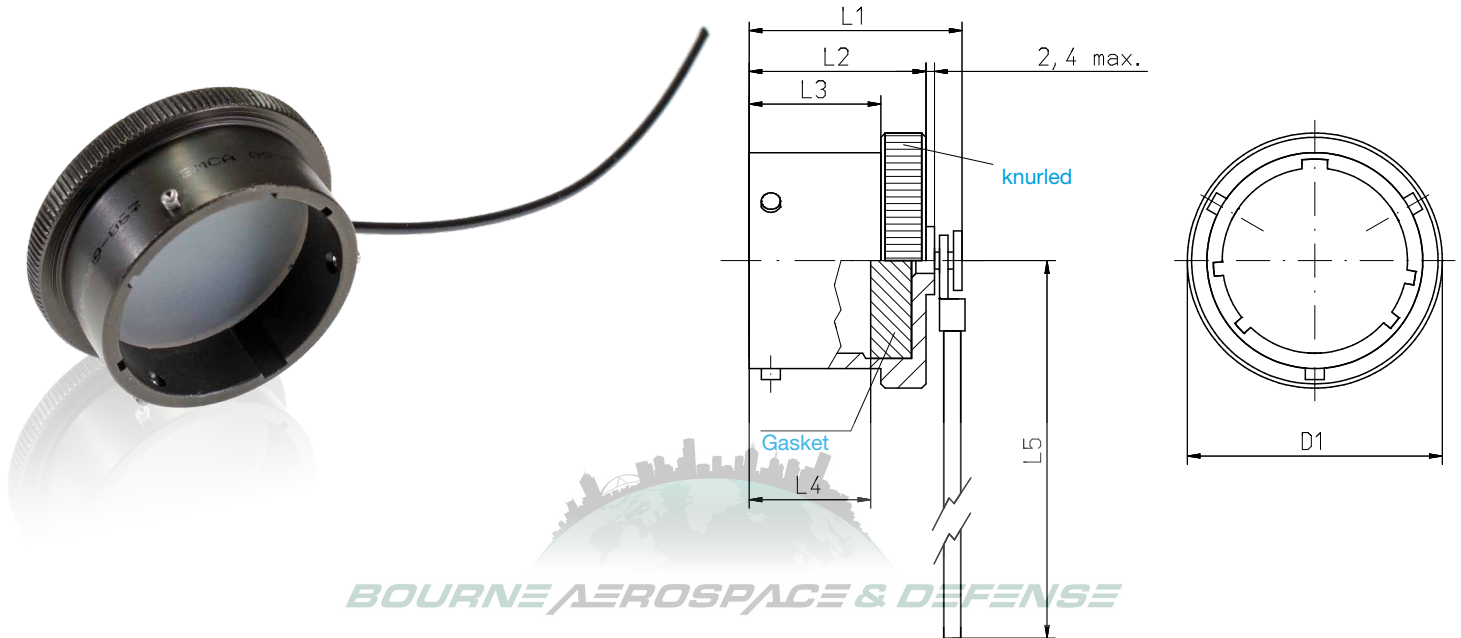

| Größe: Shell Size: | EMCA Teile-Nr. Part No. | D1 max | L1 max | L2 max | L3 +0,8 | L4 +0,25 -0,5 | L5 +13 -7 |
|-----------------------|-------------------------------|-----------|-----------|-----------|------------|---------------------|-----------------|
| 8 | C19-309-0x1 | 18,3 | 19,9 | 14,3 | 9,35 | 8,3 | 115 |
| 10 | C19-309-0x2 | 21,5 | 19,9 | 14,3 | 9,35 | 8,3 | 115 |
| 12 | C19-309-0x3 | 25,4 | 19,9 | 14,3 | 9,35 | 8,3 | 115 |
| 14 | C19-309-0x4 | 28,6 | 19,9 | 14,3 | 9,35 | 8,3 | 115 |
| 16 | C19-309-0x5 | 31,8 | 19,9 | 14,3 | 9,35 | 8,3 | 115 |
| 18 | C19-309-0x6 | 35,0 | 19,9 | 14,3 | 9,35 | 8,3 | 115 |
| 20 | C19-309-0x7 | 38,1 | 21,5 | 15,9 | 10,92 | 9,9 | 115 |
| 22 | C19-309-0x8 | 41,3 | 21,5 | 15,9 | 10,92 | 9,9 | 115 |
| 24 | C19-309-0x9 | 44,5 | 22,3 | 16,7 | 11,76 | 9,9 | 115 |

Maße im mm/Dimensions in mm

| X in EMCA Teile-Nr. X in Part No. | Basismaterial Base Material | Oberflächenbehandlung Plating finish | Seil-Material Rope-Material |
|--------------------------------------|---------------------------------------|---|--|
| C19-309-*5* | Aluminium Legierung Aluminum alloy | Stromlos vernickelt Electroless nickel | Draht-schwarz ummantelt Wire-black jacketed |
| C19-309-*6* | Aluminium Legierung Aluminum alloy | Cd grün chromatiert Cadmium olive drab | Draht-schwarz ummantelt Wire-black jacketed |

Please contact the factory for other available plating finishes

Material and Plating Finish Specification

| Material and Plating Finish | Code | RoHS Compliant |
|---|-------------|----------------|
| Stainless steel passivated electrically conductive salt spray resistant | xxx-xxx-x1x | ja yes |
| Aluminum ZnNi black chromate electrically conductive min. 500hr salt spray resistant | xxx-xxx-x2x | ja yes |
| Aluminum black anodized electrically non-conductive 96hr salt spray resistant | xxx-xxx-x3x | ja yes |
| Aluminum electroless nickel electrically conductive min. 48hr salt spray resistant | xxx-xxx-x5x | ja yes |
| Aluminum cadmium olive drab electrically conductive min. 500hr salt spray resistant | xxx-xxx-x6x | nein no |
| Aluminum Heavy Nickel min. 96hr salt spray resistant | xxx-xxx-x8x | ja yes |
| Marine Nickel Aluminum Bronze electrically conductive salt spray resistant | xxx-xxx-x9x | ja yes |

Please contact the factory for other available plating finishes.