


## Protective Cap for Receptacles:

C19-390- \_ \_ \_

To suit square flange connector receptacles to series:

VG95328; MIL-DTL-26482 Series I&II

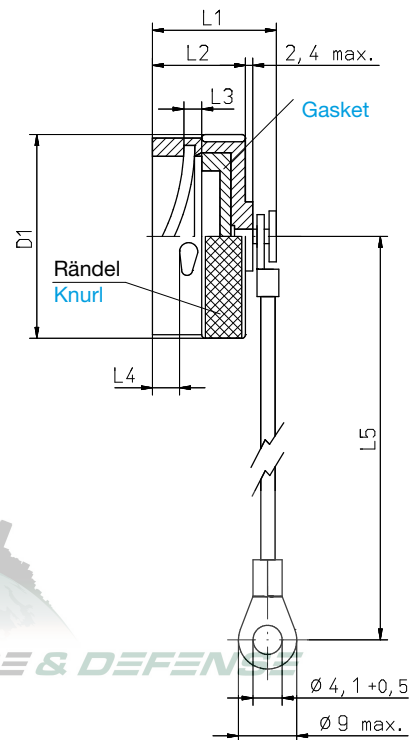

BOURNE AEROSPACE & DEFENSE

Größe: Shell Size:	EMCA Teile-Nr. Part No.	D1 max	L1 max	L2 max	L3 +0,25 -0,38	L4 max	L5 +13 -7
8	C19-390-0x1	18,7	21,5	14,3	2,92	3,78	77
10	C19-390-0x1	21,9	21,5	14,3	2,92	3,78	77
12	C19-390-0x1	25,4	21,5	14,3	2,92	3,78	89
14	C19-390-0x1	28,6	21,5	14,3	2,92	3,78	89
16	C19-390-0x1	31,8	21,5	14,3	2,92	3,78	89
18	C19-390-0x1	35,0	21,5	14,3	2,92	3,78	89
20	C19-390-0x1	38,1	21,5	14,3	2,92	3,78	102
22	C19-390-0x1	41,3	21,5	14,3	2,92	3,78	102
24	C19-390-0x1	44,5	22,3	15,3	3,73	2,21	102

Maße in mm/Dimensions in mm

X in EMCA Teile-Nr. X in Part No.	Basismaterial Base Material	Oberflächenbehandlung Plating finish	Seil-Material Rope-Material
C19-390-*3*	Aluminium Legierung Aluminum alloy	Schwarz eloxiert Black anodized	Draht-schwarz ummantelt Wire-black jacketed
C19-390-*5*	Aluminium Legierung Aluminum alloy	Stromlos vernickelt Electroless nickel	Draht-schwarz ummantelt Wire-black jacketed
C19-390-*6*	Aluminium Legierung Aluminum alloy	Cd grün chromatiert Cadmium olive drab	Draht-schwarz ummantelt Wire-black jacketed

Please contact the factory for other available plating finishes

## Material and Plating Finish Specification

Material and Plating Finish	Code	RoHS Compliant
Stainless steel passivated electrically conductive salt spray resistant	xxx-xxx-x1x	ja yes
Aluminum ZnNi black chromate electrically conductive min. 500hr salt spray resistant	xxx-xxx-x2x	ja yes
Aluminum black anodized electrically non-conductive 96hr salt spray resistant	xxx-xxx-x3x	ja yes
Aluminum electroless nickel electrically conductive min. 48hr salt spray resistant	xxx-xxx-x5x	ja yes
Aluminum cadmium olive drab electrically conductive min. 500hr salt spray resistant	xxx-xxx-x6x	nein no
Aluminum Heavy Nickel min. 96hr salt spray resistant	xxx-xxx-x8x	ja yes
Marine Nickel Aluminum Bronze electrically conductive salt spray resistant	xxx-xxx-x9x	ja yes

Please contact the factory for other available plating finishes.