


Endkappe:
Connector Shorting Cap:
K39-259- _ _ _

Passend für Steckverbinder nach Serien:

To suit connector series:

MIL-DTL-38999 Series III; JN1034; BS9520 G0003; VG95319-100x;
EN3645-001; CECC75201-002

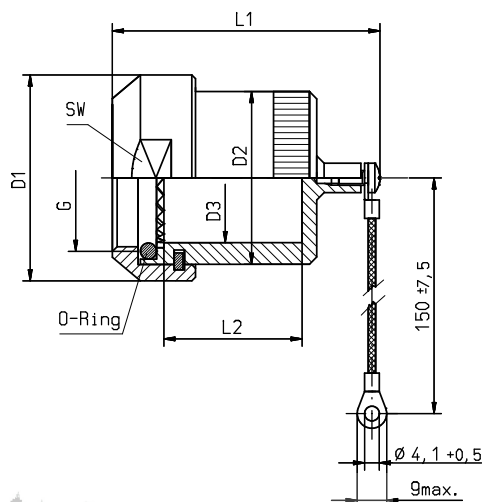

Anwendung:

Für hohe Schirmwirkung.

Wasserdichtheits-Anforderungen entsprechend der VG95319-1011.

Applications:

For high level shielding effectiveness.

Environmental sealing requirements acc. to VG 95319-1011.

Größe: Shell Size:	EMCA Teile-Nr. Part No.	D1 ±0,2	D2 +0,5 0	D3 +0,25 0	L1 max	L2 ±0,5	SW 0 -0,2	G Gewinde Thread Size
9	K39-259-0x1	19,0	14,4	8,5	38,0	19,0	17	M12x1
11	K39-259-0x2	22,0	17,4	12,0	38,0	19,0	20	M15x1
13	K39-259-0x3	25,0	20,5	13,8	38,0	19,0	23	M18x1
15	K39-259-0x4	29,0	23,5	18,0	38,0	19,0	27	M22x1
17	K39-259-0x5	32,0	26,5	21,1	38,0	19,0	30	M25x1
19	K39-259-0x6	36,0	30,5	24,1	38,0	19,0	34	M28x1
21	K39-259-0x7	39,0	33,5	27,1	38,0	19,0	37	M31x1
23	K39-259-0x8	43,0	37,7	30,1	38,0	19,0	41	M34x1
25	K39-259-0x9	46,0	39,7	33,3	38,0	19,0	44	M37x1

Maße im mm/Dimensions in mm

X in EMCA Teile-Nr. X in Part No.	Basismaterial Base Material	Oberflächenbehandlung Plating finish	Seil-Material Rope Material
K39-259-*5*	Aluminium Legierung Aluminum alloy	Stromlos vernickelt Electroless nickel	PA-dunkel eingefärbt, reflektionsarm Polyamide, dark, low reflection
K39-259-*6*	Aluminium Legierung Aluminum alloy	Cd grün chromatiert Cadmium olive drab	PA-dunkel eingefärbt, reflektionsarm Polyamide, dark, low reflection

Weitere Oberflächen, Werkstoffe (s. Seite 4) und Einbaulängen L2, auf Anfrage.

Please contact the factory for other available plating finishes and materials (see page 4) and other available internal cavity clearances, L2.

Material and Plating Finish Specification

Material and Plating Finish	Code	RoHS Compliant
Stainless steel passivated electrically conductive salt spray resistant	xxx-xxx-x1x	ja yes
Aluminum ZnNi black chromate electrically conductive min. 500hr salt spray resistant	xxx-xxx-x2x	ja yes
Aluminum black anodized electrically non-conductive 96hr salt spray resistant	xxx-xxx-x3x	ja yes
Aluminum electroless nickel electrically conductive min. 48hr salt spray resistant	xxx-xxx-x5x	ja yes
Aluminum cadmium olive drab electrically conductive min. 500hr salt spray resistant	xxx-xxx-x6x	nein no
Aluminum Heavy Nickel min. 96hr salt spray resistant	xxx-xxx-x8x	ja yes
Marine Nickel Aluminum Bronze electrically conductive salt spray resistant	xxx-xxx-x9x	ja yes

Please contact the factory for other available plating finishes.