


Endkappe:
Connector Shorting Cap:
K59-534- _ _ _

Passend für Steckverbinder nach Serien:
To suit connector series:
VG96912B; JN1003A

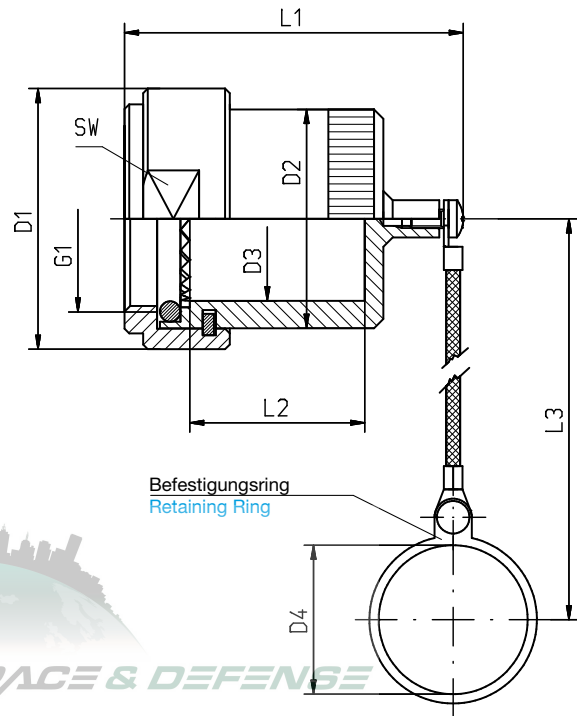

Anwendung:

Für hohe Schirmwirkung.
Wasserdichtheits-Anforderungen entsprechend der VG 96912.

Applications:

For high level shielding effectiveness.
Environmental sealing requirements acc. to VG 96912.

Größe: Shell Size:	EMCA Teile-Nr. Part No.	D1 ±0,2	D2 +0,5 0	D3 +0,25 0	D4 min	L1 max	L2 ±0,25	L3 ±7,5	SW 0 -0,2	G1-Gewinde Thread Size UNEF-2B
8	K59-534-0x1	19,0	14,4	8,5	14,6	38,0	19,0	150,0	17	7/16-28
10	K59-534-0x2	22,0	17,4	11,3	17,8	38,0	19,0	150,0	20	9/16-24
12	K59-534-0x3	25,0	20,5	14,4	22,5	38,0	19,0	150,0	23	11/16-24
14	K59-534-0x4	28,0	23,5	17,4	25,7	38,0	19,0	150,0	26	13/16-20
16	K59-534-0x5	31,0	26,5	20,4	28,9	38,0	19,0	150,0	29	15/16-20
18	K59-534-0x6	34,0	30,5	23,4	32,1	38,0	19,0	150,0	32	1 1/16-18
20	K59-534-0x7	38,0	33,5	26,5	35,2	38,0	19,0	150,0	36	1 3/16-18
22	K59-534-0x8	42,0	37,7	29,9	38,4	38,0	19,0	150,0	39	1 5/16-18
24	K59-534-0x9	45,0	39,7	32,9	41,6	38,0	19,0	150,0	43	1 7/16-18

Maße im mm/Dimensions in mm

X in EMCA Teile-Nr. X in Part No.	Basismaterial Base Material	Oberflächenbehandlung Plating finish	Seil-Material Rope Material
K59-534-*5*	Aluminium Legierung Aluminum alloy	Stromlos vernickelt Electroless nickel	PA-dunkel eingefärbt, reflektionsarm Polyamide, dark, low reflection
K59-534-*6*	Aluminium Legierung Aluminum alloy	Cd grün chromatiert Cadmium olive drab	PA-dunkel eingefärbt, reflektionsarm Polyamide, dark, low reflection

Weitere Oberflächen, Werkstoffe (s. Seite 4) und Einbaulängen L2, auf Anfrage.

Für VG96912 B sind die Endkappen um eine Größe größer zu wählen. Größe 24 entspricht jedoch wieder der Steckdosengröße 24.

Please contact the factory for other available plating finishes and materials (see page 4) and other available internal cavity clearances, L2. For VG96912 style B connectors other than shell size 24, select a cap one shell size larger than the connector.

Material and Plating Finish Specification

Material and Plating Finish	Code	RoHS Compliant
Stainless steel passivated electrically conductive salt spray resistant	xxx-xxx-x1x	ja yes
Aluminum ZnNi black chromate electrically conductive min. 500hr salt spray resistant	xxx-xxx-x2x	ja yes
Aluminum black anodized electrically non-conductive 96hr salt spray resistant	xxx-xxx-x3x	ja yes
Aluminum electroless nickel electrically conductive min. 48hr salt spray resistant	xxx-xxx-x5x	ja yes
Aluminum cadmium olive drab electrically conductive min. 500hr salt spray resistant	xxx-xxx-x6x	nein no
Aluminum Heavy Nickel min. 96hr salt spray resistant	xxx-xxx-x8x	ja yes
Marine Nickel Aluminum Bronze electrically conductive salt spray resistant	xxx-xxx-x9x	ja yes

Please contact the factory for other available plating finishes.